




**CUSTOMER SUPPLIED POLE MOUNTED  
OVERHEAD METER ASSEMBLY,  
RESIDENTIAL, 200 AMP RATED**

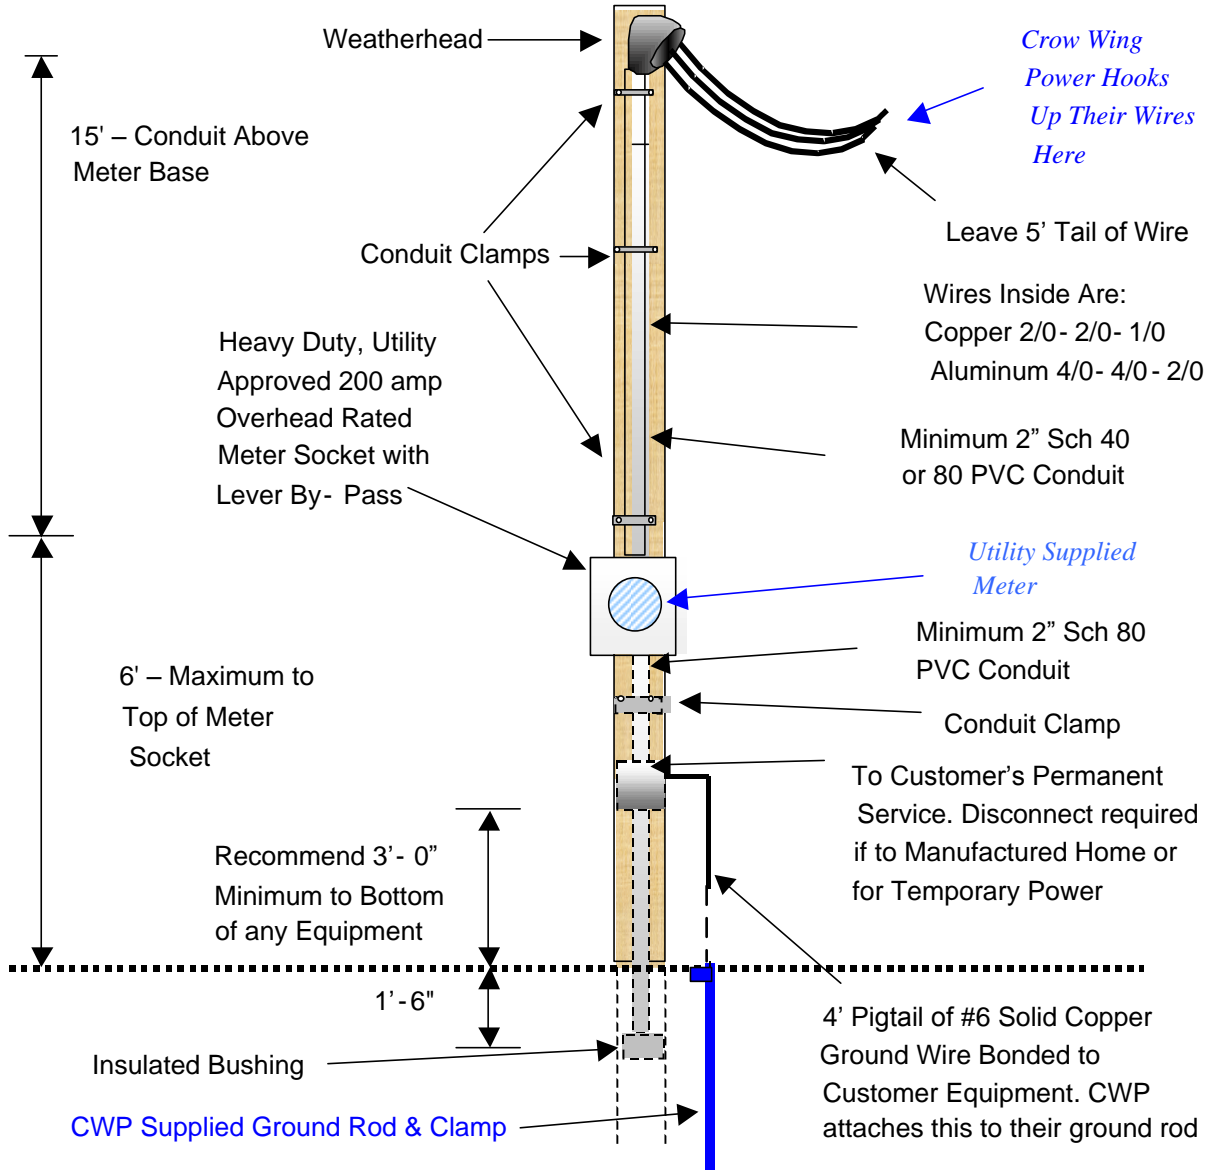


**Notes:**

All meter assemblies must be approved by the Minnesota State Board of Electricity prior to energizing by Crow Wing Power.


Consult with the State Wiring Inspector BEFORE hooking up to a Manufactured or Mobile Home.

## TYPICAL APPLICATIONS

### Overhead Service to Meter On Pole to "Stick Built" House

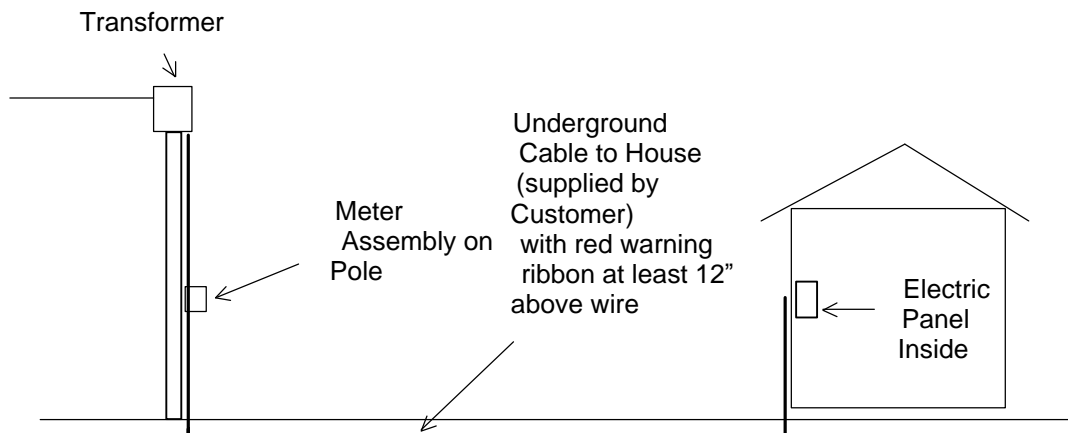

### Overhead Service to Meter On Pole to "Manufactured" House

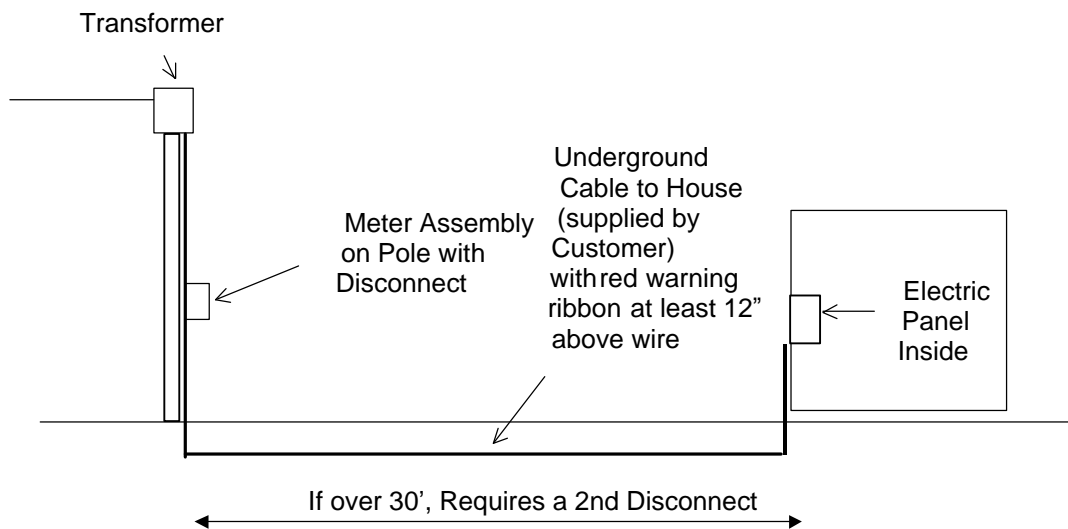

- Customer supplied wiring from the load side of the meter equipment must be sized in accordance with the National Electric Code.
- Wire size of a residential single phase dwelling service can be sized using the table notes for Article 310:15 (B)(6).
- Any secondary residential type service for heating or air conditioning (continuous duty service) are not subject to derating and must be sized from table 310:16. This is for both direct and subtractive metering.
- Red warning ribbon is placed at least 12" above underground wiring.